Clamp Style Tablet Holder for Zwift Ride

Installation Instructions

Step 1. Remove Zwift End Cap

Remove the rubber tray mat that sits on top the stem. Then use the Zwift Frame Key that attaches to the underside of the Zwift Ride top tube to loosen the bolt underneath the handlebar stem.

Pull the end cap off the end of the stem.

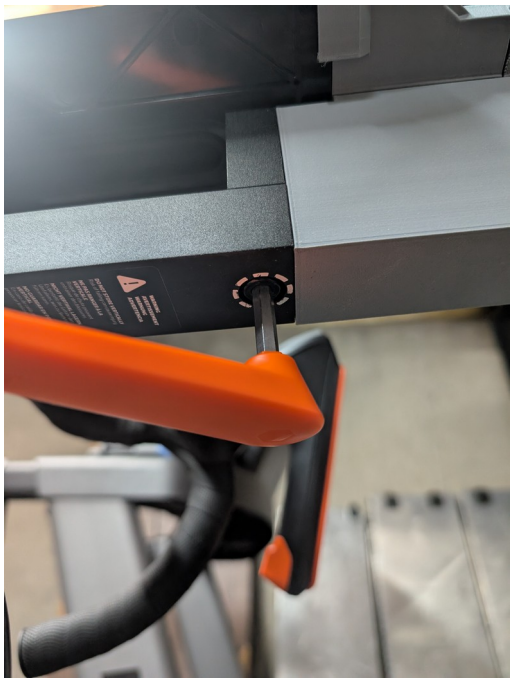

Step 2. Disassemble the Zwift End Cap

The Zwift End Cap is comprised of three pieces joined by self tapping screws. The three pieces are the metal dovetail block, tray, and cover. Disassemble the End Cap using a philips screwdriver. Set the 6 screws and metal dovetail block aside for use with your new tablet holder.

Step 3. Assemble your Tablet Holder End Cap.

First slide the Clamp Bottom onto the Base. Secure the Clamp Bottom to the Base with one of the self tapping screws you removed when disassembling the Zwift End Cap.

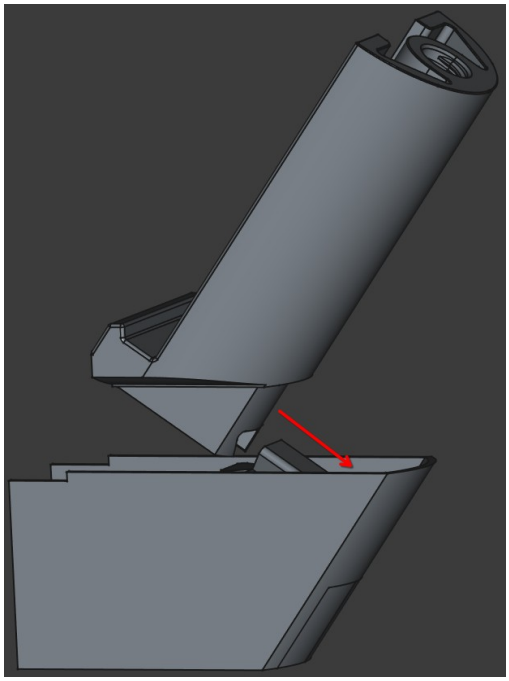

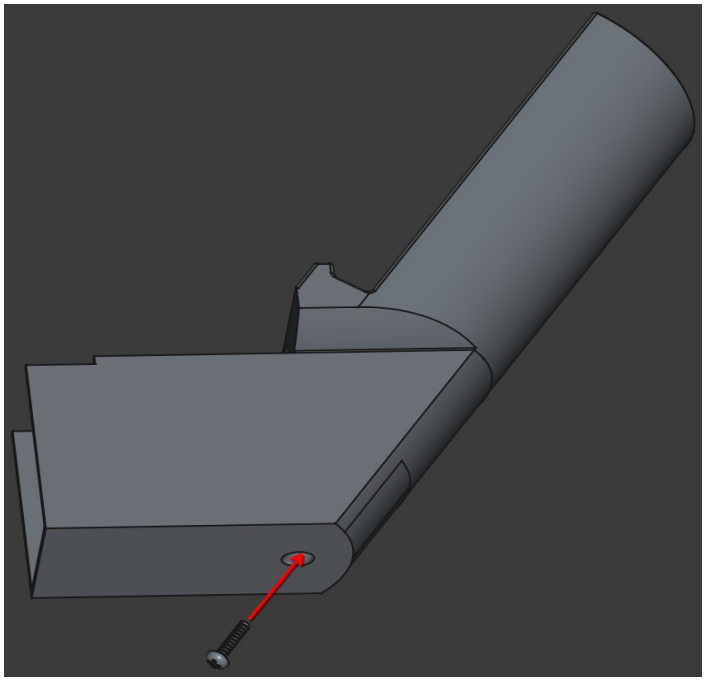

Then slide the Tray down in front of the Clamp Bottom onto the Base. Install one of the self tapping screws through the center hole in front of the Tray.

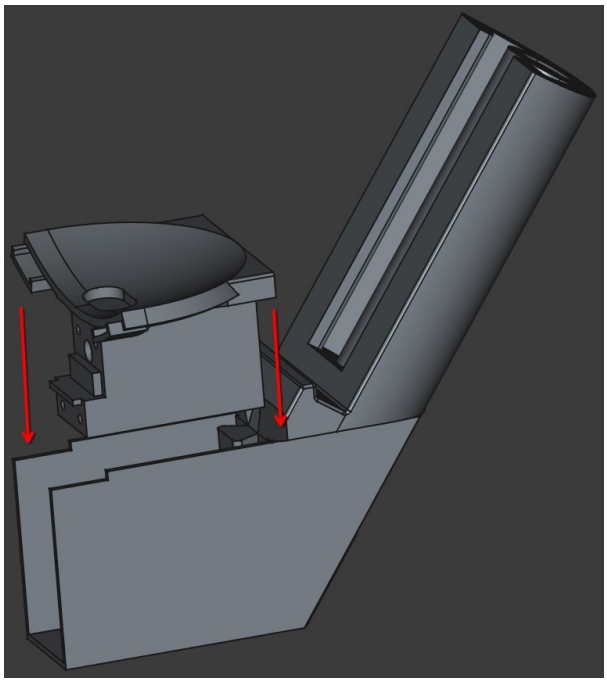

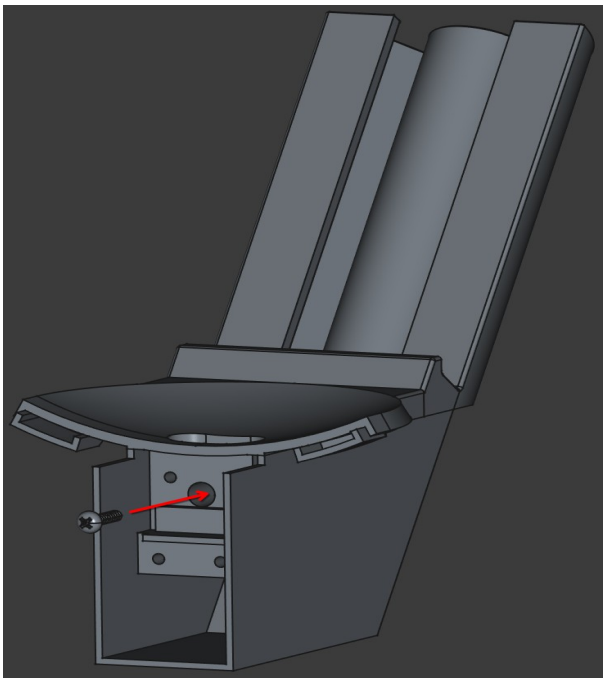

Slide the Clamp Top into the Clamp Bottom then thread the Screw into the Clamp Bottom.

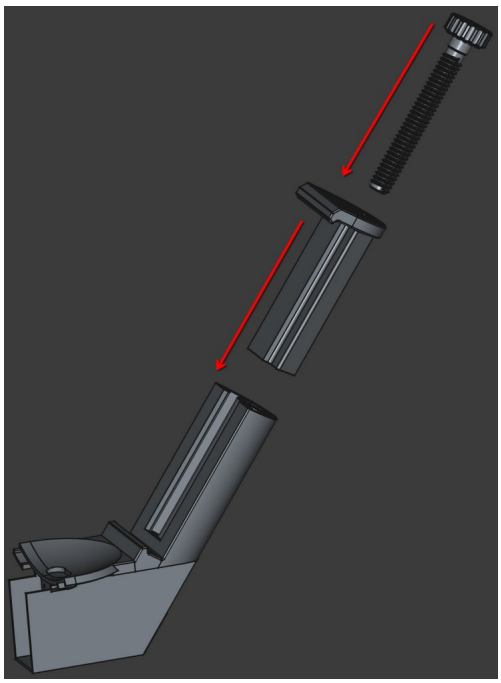

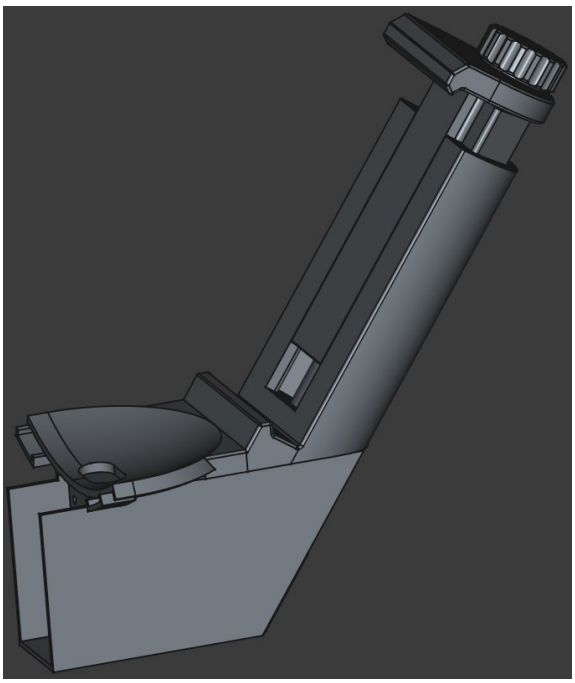

Now attach the metal dovetail block to the Tablet Holder. Loosely thread the four remaining self tapping screws into the front of the Tray. Center the block on the Tablet Holder then tighten the screws.

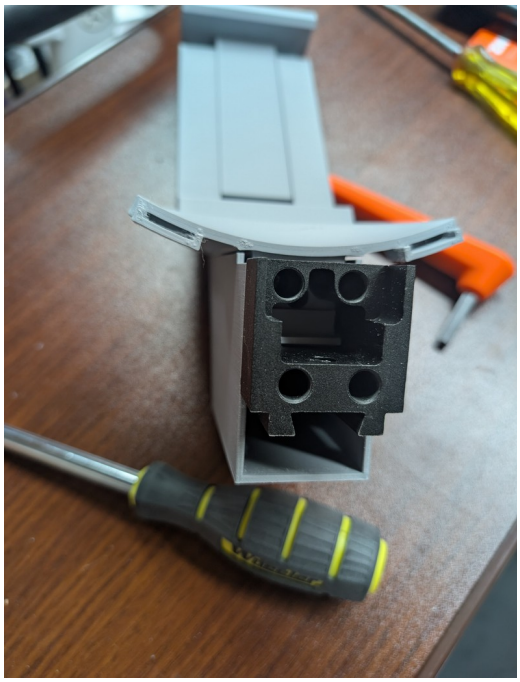

Step 4. Install the Tablet Holder onto the Zwift Ride.

Now slide the metal dovetail block onto the stem and reinstall the bolt. Replace the rubber tray.